



SUBMITTAL DATA SHEET

One Way Cassette Heat Pump System


Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

Approval: _____
 Date: _____
 Construction: _____
 Unit #: _____
 Drawing #: _____

Set Model
 Indoor unit model CCOXHA4C18

Certified

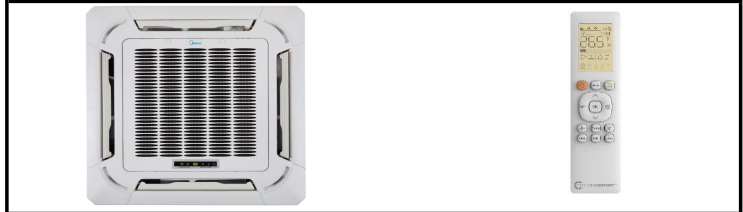

REFRIGERANT PIPE DATA

Throttle type	Indoor unit	N/A
	Outdoor unit	EXV
Design pressure	(PSIG)	550/340
Refrigerant Type		R410A
Refrigerant charge	oz	65.26
Refrigerant precharge	(ft)	25.0
Additional charge for each ft	(oz/ft)	0.16
Liquid side/ Gas side(indoor)	(inch)	1/4" / 1/2"
Liquid side/ Gas side(outdoor)	(inch)	1/4" / 1/2"
Max. pipe length	(ft)	98.4
Max. difference in level	(ft)	65.6
Connection method		Flared

OPERATING RANGE

Indoor(cooling)	(Deg. °F)	62~90
Indoor(heating)	(Deg. °F)	32~86

INDOOR UNIT DATA

Indoor fan motor		
Model		ZKFP-46-8-1
Qty		1
Input	(W)	45.00
Output	(W)	46.0
RLA	(A)	1.50
Speed(Hi/Mi/Lo)	(r/min)	730/630/570
Air flow & Noise level		
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	//562.35/485.29/438.82
Indoor noise level (Hi/Med/Lo)	[dB(A)]	43.5/38.5/35.5
Dehumidification		(L/H)
		2.22
Indoor unit		
Dimension (WxDxH)	(inch)	22.44x22.44x10.24
Packing(WxDxH)	(inch)	26.06x26.06x12.48
Net/Gross weight	(lbs.)	35.71/46.96

Indoor unit dimensions

