




SUBMITTAL DATA SHEET

Wall Mounted Heat Pump System	
Location: _____ Engineer: _____ Submitted to: _____ Submitted by: _____ Reference: _____	Approval: _____ Date: _____ Construction: _____ Unit #: _____ Drawing #: _____

Set Model	Indoor unit model CCOXHAWM06HP Outdoor unit model CCOXHASZ06HP
Certified	

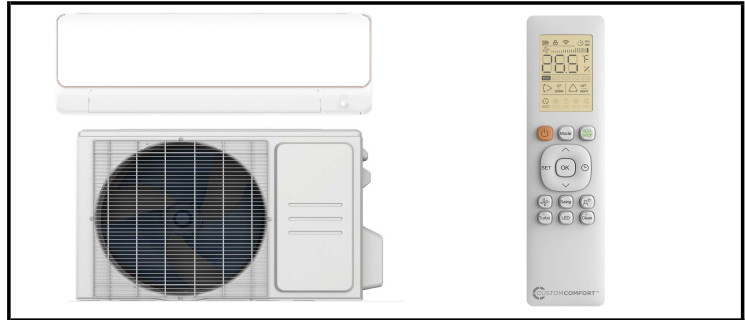

SYSTEM PERFORMANCE DATA			
Power supply			
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph, 60Hz	
Voltage Range	(V)	187-253	
Electrical			
Minimum circuit ampacity(Outdoor)	(A)	13.0	
Max.fuse(Outdoor)	(A)	15.0	
Connection wiring		14AWG*4	
Cooling			
Capacity	(Btu/h)	6000(3400~12000)	
Power Input	(W)	380(166~1008)	
Current	(A)	3.3(0.72~4.38)	
SEER2	(Btu/W)	26.5	
EER2	(Btu/W)	15.8	
Heating			
Capacity	(Btu/h)	7000(3300~11500)	
Power Input	(W)	449(241~1200)	
Current	(A)	3.92(1.05~5.2)	
HSPF2-4	(Btu/W)	13.6	
HSPF2-5	(Btu/W)	10.0	
COP	W/W	3.92	
Heat at 17F(H32)	(Btu/h)	8500	
Heat at 5F(H42)	(Btu/h)	7500	
COP at 5F(H42)	W/W	2.10	


REFRIGERANT PIPE DATA			
Refrigerant charge	oz	38.10	
Refrigerant precharge	(ft)	25.0	
Additional charge for each ft	(oz/ft)	0.16	
Liquid side/ Gas side(indoor)	(inch)	1/4"/3/8"	
Liquid side/ Gas side(outdoor)	(inch)	1/4"/3/8"	
Max. pipe length	(ft)	82.0	
Max. difference in level	(ft)	32.8	
Connection method		Flared	

OPERATING RANGE			
Indoor(cooling)	(Deg. °F)	60~90	
Indoor(heating)	(Deg. °F)	32~86	
Outdoor(cooling)	(Deg. °F)	-22~122	
Outdoor(heating)	(Deg. °F)	-22~75	

INDOOR UNIT DATA			
Indoor fan motor			
Model		ZKFP-20-8-6-7	
Qty		1	
Input	(W)	50.00	
Output	(W)	20.0	
RLA	(A)	0.4	
Speed(Hi/Mi/Lo)	(r/min)	1050/930/870	
Air flow & Noise level			
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	364.71/317.65/217.65/167.65	
Indoor noise level (Hi/Med/Lo)	[dB(A)]	36/32/23	
Dehumidification			
	(L/H)	0.15	
Indoor unit			
Dimension (WxDxH)	(inch)	33.40x9.18x11.76	
Packing(WxDxH)	(inch)	36.22x12.20x14.57	
Net/Gross weight	(lbs.)	22.71/28.88	

OUTDOOR UNIT DATA			
Compressor			
Type		ROTARY	
Model		KSK103D33UEZ3	
Brand		GMCC	
Capacity	(Btu/h)	11106	
Input	(W)	826	
Rated current (RLA)	(A)	6.4	
Refrigerant oil/oil charge	(ml)	ESTER OIL VG74 310	
Outdoor fan motor			
Model		ZKFN-34-10-1	
Qty		1	
Input	(W)	/	
Output	(W)	34	
RLA	(A)	0.4	
Speed	(r/min)	800/600	
Air flow & Noise level			
Outdoor air flow (Max.)	(CFM)	1294	
Outdoor noise level	[dB(A)]	53.5	
Outdoor unit			
Dimension (WxDxH)	(inch)	30.12x11.93x21.85	
Packing (WxDxH)	(inch)	34.92x13.27x24.02	
Net/ Gross weight	(lbs.)	63.71/69.00	

Indoor unit dimensions

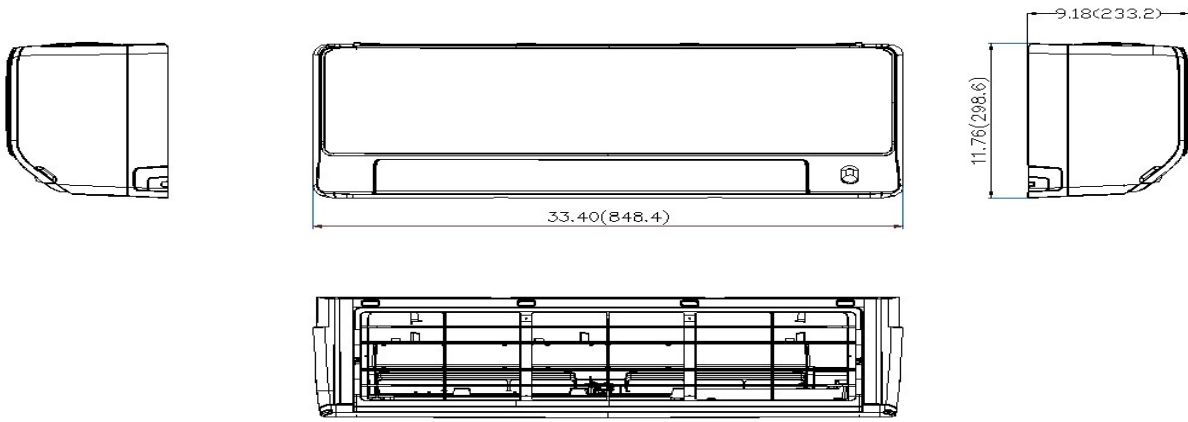

Outdoor unit dimensions

