



# SUBMITTAL DATA SHEET

## One Way Cassette Heat Pump System

Location: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted to: \_\_\_\_\_  
 Submitted by: \_\_\_\_\_  
 Reference: \_\_\_\_\_


Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Unit #: \_\_\_\_\_  
 Drawing #: \_\_\_\_\_

**Set Model**  
 Indoor unit model CCOXHA4C09  
 Outdoor unit model CCOXHASZ09HP

**Certified**

AHRI  

UL 

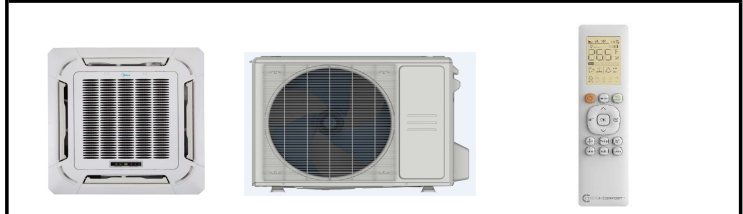

### SYSTEM PERFORMANCE DATA

<b>Power supply</b>		
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph, 60Hz
Voltage Range	(V)	187-253
<b>Electrical</b>		
Minimum circuit ampacity(Outdoor)	(A)	15.0
Max.fuse(Outdoor)	(A)	15.0
Connection wiring		14*4 AWG
<b>Cooling</b>		
Capacity	(Btu/h)	9000(2850~11100)
Power Input	(W)	692(163~1117)
Current	(A)	3.17(1.25~4.93)
SEER2	(Btu/W)	20.5
EER2	(Btu/W)	13.0
<b>Heating</b>		
Capacity	(Btu/h)	9800(2270~12500)
Power Input	(W)	930(149~1371)
Current	(A)	4.58(1.17~6.04)
HSPF2-4	(Btu/W)	10.3
HSPF2-5	(Btu/W)	7.8
COP	W/W	3.09
Heat at 17F(H32)	(Btu/h)	9000
Heat at 5F(H42)	(Btu/h)	10000
COP at 5F(H42)	W/W	1.80

### REFRIGERANT PIPE DATA

Throttle type	Indoor unit	N/A
	Outdoor unit	EXV
Design pressure	(PSIG)	550/340
Refrigerant Type		R410A
Refrigerant charge	oz	41.62
Refrigerant precharge	(ft)	25.0
Additional charge for each ft	(oz/ft)	0.16
Liquid side/ Gas side(indoor)	(inch)	1/4" / 3/8"
Liquid side/ Gas side(outdoor)	(inch)	1/4" / 3/8"
Max. pipe length	(ft)	82.0
Max. difference in level	(ft)	32.8
Connection method		Flared
Indoor(cooling)	(Deg. °F)	62~90
Indoor(heating)	(Deg. °F)	32~86
Outdoor(cooling)	(Deg. °F)	-22~122
Outdoor(heating)	(Deg. °F)	-22~75


### INDOOR UNIT DATA

<b>Indoor fan motor</b>		
Model		ZKFP-46-8-1
Qty		1
Input	(W)	45.00
Output	(W)	46.0
RLA	(A)	0.00
Speed(Hi/Mi/Lo)	(r/min)	600/520/460
<b>Air flow &amp; Noise level</b>		
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	//352.94/305.88/270.59
Indoor noise level (Hi/Med/Lo)	[dB(A)]	39.5/36/32.5
<b>Dehumidification</b>	(L/H)	1.03
<b>Indoor unit</b>		
Dimension (WxDxH)	(inch)	22.44x22.44x10.24
Packing(WxDxH)	(inch)	26.06x26.06x12.48
Net/Gross weight	(lbs.)	31.97/38.14

### OUTDOOR UNIT DATA

<b>Compressor</b>		
Type		ROTARY
Model		KTN110D42UFZ
Brand		GMCC
Capacity	(Btu/h)	11823
Input	(W)	885
Rated current (RLA)	(A)	8.8
Refrigerant oil/oil charge	(ml)	VG74/350
<b>Outdoor fan motor</b>		
Model		ZKFN-34-10-1
Qty		1
Input	(W)	/
Output	(W)	34.00
RLA	(A)	0.42
Speed	(r/min)	850/680/450
<b>Air flow &amp; Noise level</b>		
Outdoor air flow (Max.)	(CFM)	1323.5
Outdoor noise level	[dB(A)]	55.0
<b>Outdoor unit</b>		
Dimension (WxDxH)	(inch)	31.69x12.99x21.81
Packing (WxDxH)	(inch)	36.02x14.57x24.21
Net/ Gross weight	(lbs.)	74.07/80.25

### Indoor unit dimension

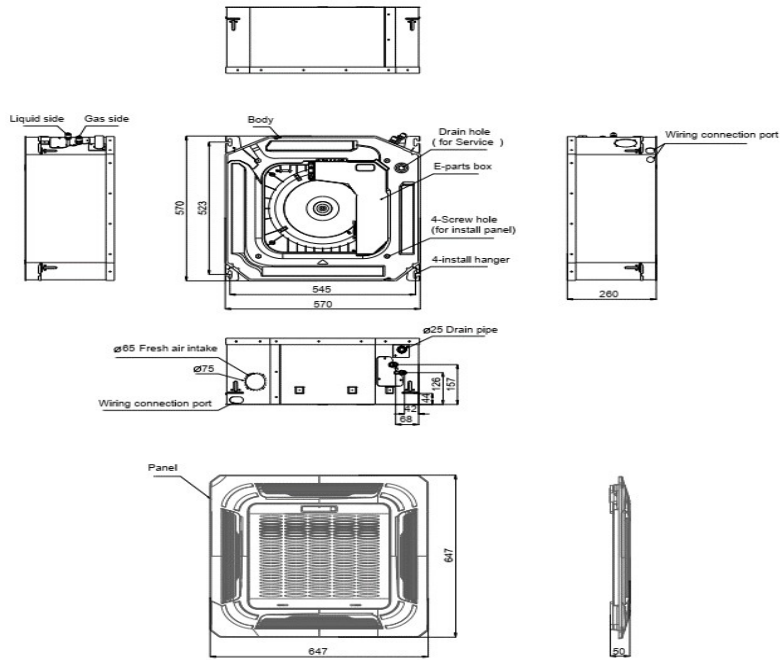

### Outdoor unit dimension

