



SUBMITTAL DATA SHEET


Wall Mounted Heat Pump System

Location: _____ Engineer: _____ Submitted to: _____ Submitted by: _____ Reference: _____	Approval: _____ Date: _____ Construction: _____ Unit #: _____ Drawing #: _____
--	--

Set Model
 Indoor unit model: CCOXHAWM09HP
 Outdoor unit model: CCOXHASZ09HP

Certified

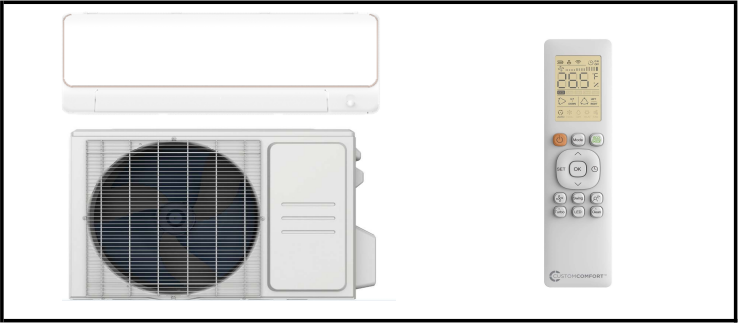

SYSTEM PERFORMANCE DATA

Power supply		
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph, 60Hz
Voltage Range	(V)	187-253
Electrical		
Minimum circuit ampacity(Outdoor)	(A)	15.0
Max.fuse(Outdoor)	(A)	15.0
Connection wiring		14AWG*4
Cooling		
Capacity	(Btu/h)	9000(3300~14300)
Power Input	(W)	556(180~1180)
Current	(A)	2.5(0.78~5.13)
SEER2	(Btu/W)	28.1
EER2	(Btu/W)	16.2
Heating		
Capacity	(Btu/h)	12000(5000~15200)
Power Input	(W)	907(370~1500)
Current	(A)	4.1(1.6~6.52)
HSPF2-4	(Btu/W)	11.5
HSPF2-5	(Btu/W)	9.0
COP	W/W	3.81
Heat at 17F(H32)	(Btu/h)	9500
Heat at 5F(H42)	(Btu/h)	10600
COP at 5F(H42)	W/W	2.00

REFRIGERANT PIPE DATA

Design pressure	(PSIG)	550/340
Refrigerant Type		R410A
Refrigerant charge	oz	41.62
Refrigerant precharge	(ft)	25.0
Additional charge for each ft	(oz/ft)	0.16
Liquid side/ Gas side(indoor)	(inch)	1/4"/3/8"
Liquid side/ Gas side(outdoor)	(inch)	1/4"/3/8"
Max. pipe length	(ft)	82.0
Max. difference in level	(ft)	32.8
Connection method		Flared

OPERATING RANGE

Indoor(cooling)	(Deg. °F)	60~90
Indoor(heating)	(Deg. °F)	32~86
Outdoor(cooling)	(Deg. °F)	-22~122
Outdoor(heating)	(Deg. °F)	-22~75


INDOOR UNIT DATA

Indoor fan motor		
Model		ZKFP-20-8-6-21
Qty		1
Input	(W)	50.00
Output	(W)	20.0
RLA	(A)	0.3
Speed(Hi/Mi/Lo)	(r/min)	1100/850/700
Air flow & Noise level		
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	382.35/335.29/229.41/176.47
Indoor noise level (Hi/Med/Lo)	[dB(A)]	38/33.5/23.5
Dehumidification		
	(L/H)	0.38
Indoor unit		
Dimension (WxDxH)	(inch)	33.40x9.18x11.76
Packing(WxDxH)	(inch)	36.22x12.20x14.57
Net/Gross weight	(lbs.)	22.71/28.88

OUTDOOR UNIT DATA

Compressor		
Type		ROTARY
Model		KTN110D42UFZ
Brand		GMCC
Capacity	(Btu/h)	11823
Input	(W)	885
Rated current (RLA)	(A)	8.8
Refrigerant oil/oil charge	(ml)	VG74/350
Outdoor fan motor		
Model		ZKFN-34-10-1
Qty		1
Input	(W)	/
Output	(W)	34
RLA	(A)	0.4
Speed	(r/min)	850/680/450
Air flow & Noise level		
Outdoor air flow (Max.)	(CFM)	1324
Outdoor noise level	[dB(A)]	54.5
Outdoor unit		
Dimension (WxDxH)	(inch)	31.69x12.99x21.81
Packing (WxDxH)	(inch)	36.02x14.57x24.21
Net/ Gross weight	(lbs.)	74.07/80.25

Indoor unit dimensions

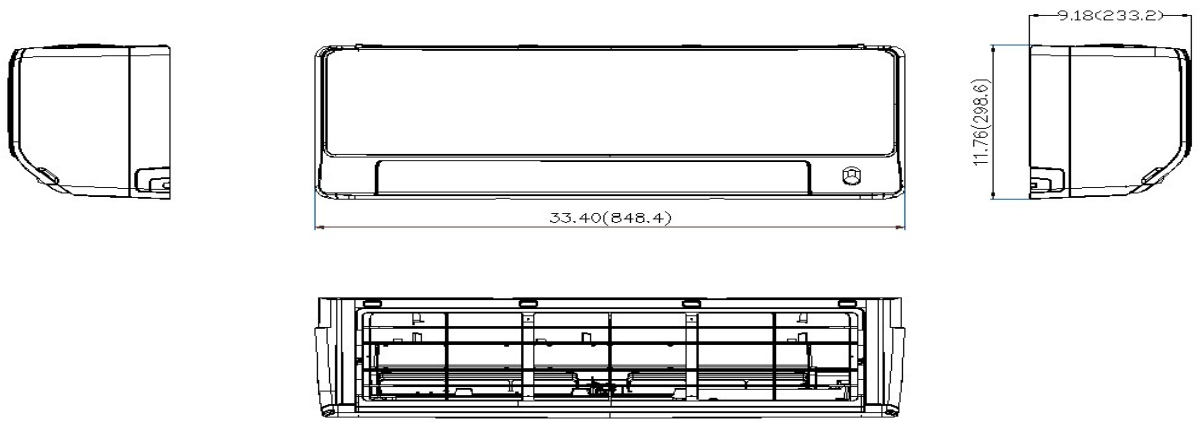

Outdoor unit dimensions

