

SUBMITTAL DATA SHEET

Series Name: Hyper Heat Acoil Series
Model Number: CCOXHB24V60HP/CCOBCC60C



Air Handler Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATION

Dimensions W×D×H (inches)	21-5/8 x 21-1/2 x 27-3/4
Package W×D×H (inches)	31-1/8 x 25 x 25-5/8
Net/Gross Weight lbs.	97 / 115

OUTDOOR SPECIFICATION

Compressor Type	TWIN-ROTARY
Compressor Model	ETPQ480D66UMU1
Refrigerant	R454B
Refrigerant Oil Charge(mL)	1300
Refrigerant Oil	VG75
Outdoor Air Flow (Max) (CFM)	2,649
Outdoor Noise Level (dBA)	64
Dimensions W×D×H (inches)	37-1/2 x 16-3/8 x 52-1/2
Package W×D×H (inches)	43-1/8 x 19-1/2 x 58-1/4
Net/Gross Weight lbs.	242 / 275

EFFICIENCY

Cooling		Heating	
SEER2	15.9	HSPF2-4	8.5
EER2	10.0	COP	2.80

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	52000
Min/Max Capacity	23,400~55,500
Moisture Removal(L/h)	8.4
Standard Operating Range(°F/°C)	-22~122(-30~50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	56000
2. @ 47°F Min/Max Capacity	11,700~61,300
3. @ 17°F Rated	37800
4. @ 5°F Rated: Capacity / COP	45000/1.8
5. @ 5°F Max: Capacity	45000
Standard Operating Range(°F/°C)	-22~75(-30~24)
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Heating Conditions, Compressor Operating at Max. Frequency	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


ELECTRICAL

Indoor Power Supply	24V,60Hz,1Ph
Indoor MCA 115V/(208/230V)	/
Indoor MOP	/
Outdoor Power Supply	208/230,60Hz,1Ph
Outdoor MCA	40
Outdoor MOP	40
Communication Wiring	AWG 20-2
Compressor RLA	31
Outdoor Fan Motor RLA	1.2
Outdoor Fan Motor W	/
Indoor Fan Motor RLA	/
Indoor Fan Motor W	/
System Power Input @ Cooling (W)	5200(1,870 ~ 6,000)
System Power Input @ Heating (W)	5861(1,090 ~ 6,270)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING

Throttle type(Indoor)	EXV
Throttle type(Outdoor)	EXV
Liquid Size	9.52mm(3/8in)
Gas Size	19mm(3/4in)
Max. Piping Length(ft/m)	246(75)
Max. Height Difference(ft/m)	98(30)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	183.42(5.2)
Additional Charge (oz/ft)/(g/m)	0.7(65)
Connection Method	Flared


Indoor Unit Dimensions

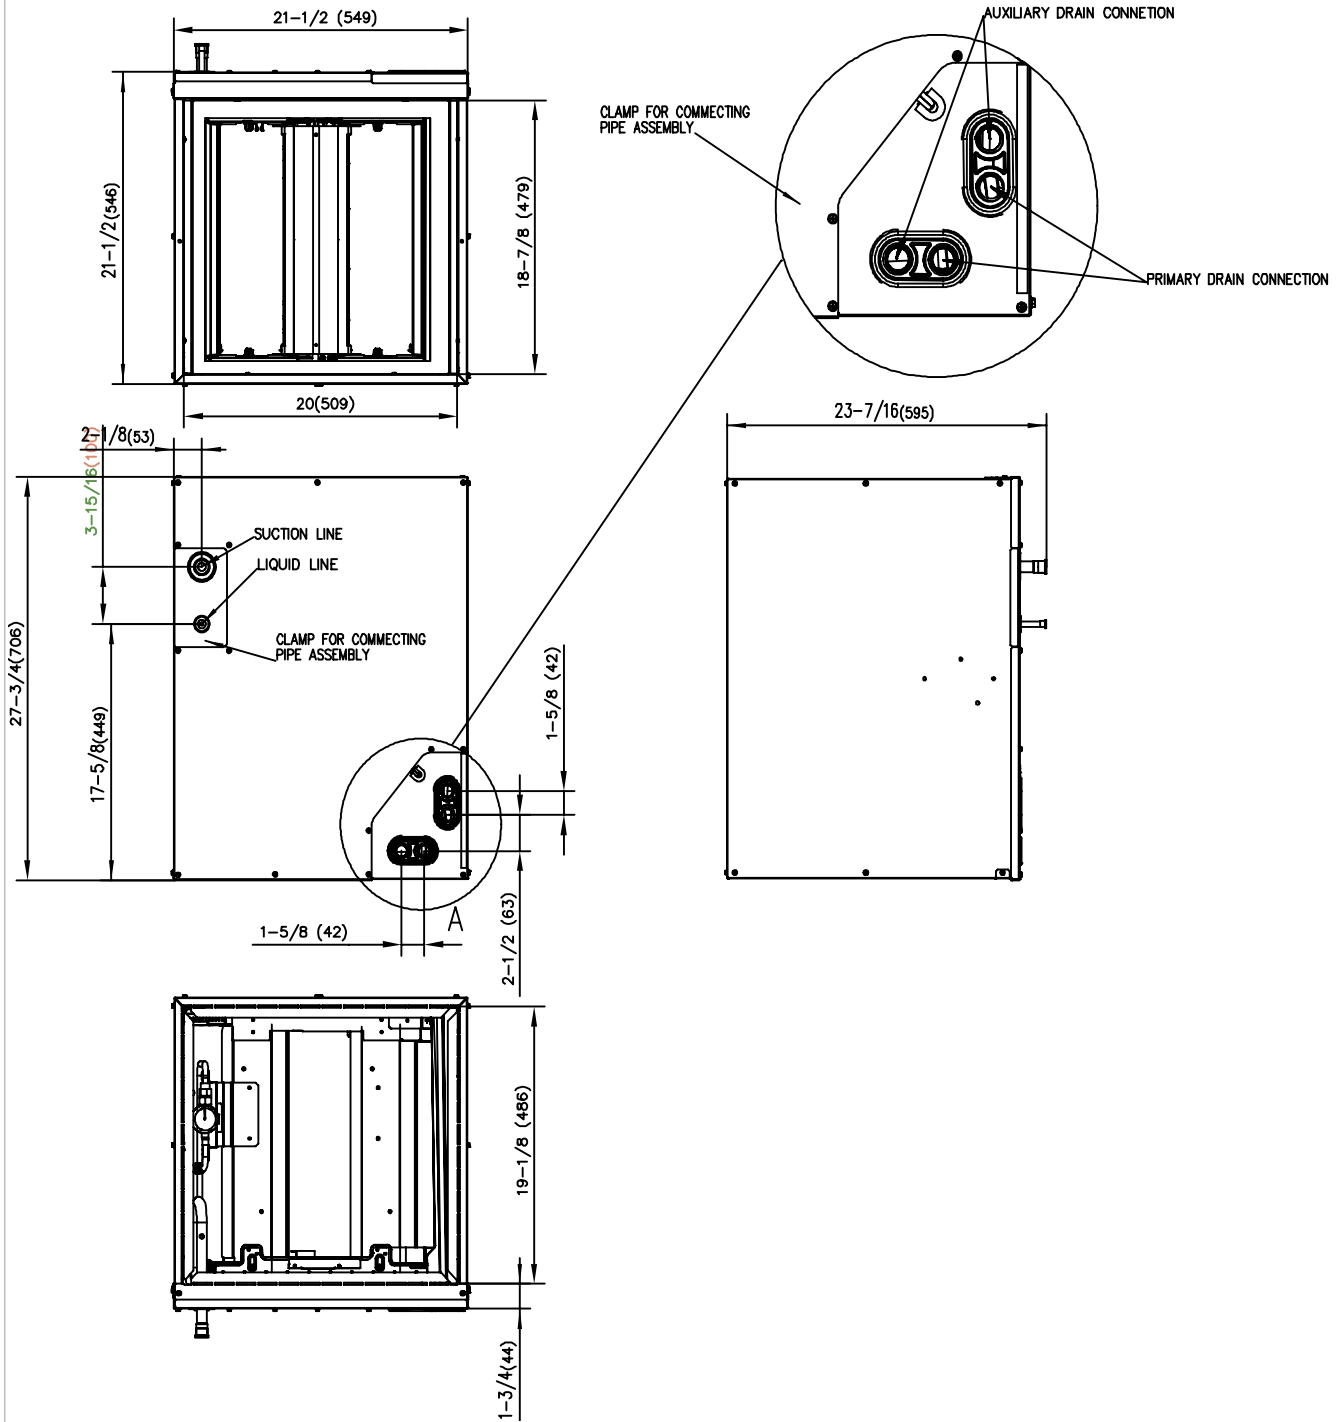

Outdoor Unit Dimensions

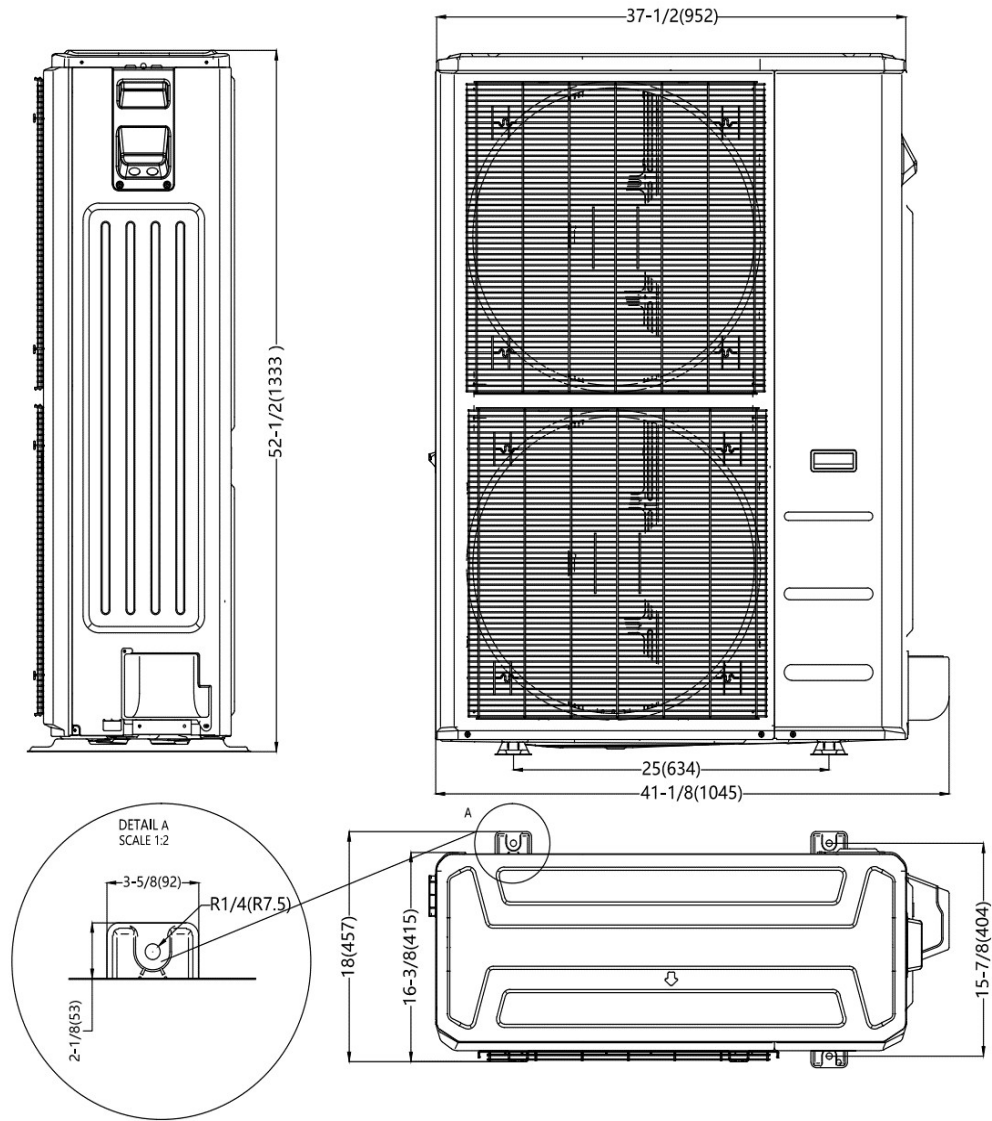

Outdoor Unit Clearances

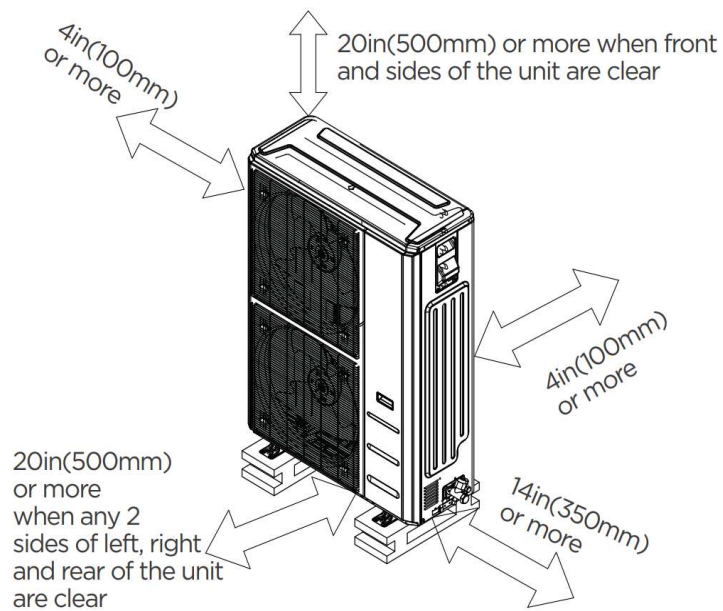

Features

- Multi-position installation: horizontal(left or right), vertical(up or down)
- Aluminum Coil
- R454B refrigerant sensor
- Easy Maintenance
- Multiple control options available:
 - Two way communication wired controller with built-in WiFi:120N(X6W)
 - Third-Party 24V Thermostat