

SUBMITTAL DATA SHEET

Series Name: Multi Zone Hyper Heat Series
Model Number: CCOXHBMZ536HP/DUCTED or MIXED



Multi Zone Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



OUTDOOR SPECIFICATION

Compressor Type	TWIN-ROTARY
Compressor Model	EKPQ420D1UMUA
Refrigerant	R454B
Refrigerant Oil Charge(mL)	1460
Refrigerant Oil	VG75
Outdoor Air Flow (Max) (CFM)	3037
Outdoor Noise Level (dBA)	65
Dimensions WxDxH (inches)	38.58 x 16.34 x 38.39
Package WxDxH (inches)	45.08 x 19.68 x 42.52
Net/Gross Weight lbs.	211.86/244.71

ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	37
Connection Wiring	AWG 14-4
System MOCP	40
Compressor RLA	20.5
Outdoor Fan Motor RLA	2.6
Outdoor Fan Motor W	250
Indoor Fan Motor RLA	/
Indoor Fan Motor W	/
System Power Input @ Cooling (W)	3000/(600 ~ 4200)
System Power Input @ Heating (W)	2776/(600 ~3650)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

EFFICIENCY

Cooling		Heating	
SEER2	19.4	HSPF2-4	10.4
EER2	12	COP	3.8

COOLING PERFORMANCE (Btu/hr)

Rated Capacity	36000
Min/Max Capacity	9000~42000
Moisture Removal(L/h)	2
Standard Operating Range(*F/*C)	-22~122/(-30~50)

Rated Cooling Conditions: Indoor: 80°F DB/67°F WB
Outdoor: 95°F DB/75°F WB

HEATING PERFORMANCE (Btu/hr)


1. @ 47°F Rated	36000
1. @ 47°F Min/Max Capacity	10000~45000
2. @ 17°F Rated(H32)	33000
3. @ 5°F Rated: Capacity / COP(H42)	38000/2
3. @ 5°F Max: Capacity	38000
Standard Operating Range(*F/*C)	-22~75/(-30~24)

1. Conditions: Indoor: 70°F DB/60°F WB
Outdoor: 47°F DB/43°F WB
2. Conditions: Indoor: 70°F DB/60°F WB
Outdoor: 17°F DB/15°F WB
3. Conditions: Indoor: 70°F DB/60°F WB
Outdoor: 5°F DB/5°F WB


PIPING

Liquid Size	5x6.35mm(5x1/4in)
Gas Size	3x9.52mm+2x12.7mm(3x3/8in+2x1/2in)
Max. Piping Length for all rooms(ft/m)	262.4/(80)
Max. Piping Length for one IDU(ft/m)	114.8/(35)
Max. Height Difference of IDU and ODU(ft/m)	49.2/(15)
Refrigerant Pre-charge Amount(oz/kg)	134.04/(3.8)
Refrigerant Precharge Length(ft/m)	24.6(7.5)x5
Additional Charge 1/4" liquid pipe(oz/ft)/(g/m)	0.16/(15)
Additional Charge 3/8" liquid pipe (oz/ft)/(g/m)	0.32(30)
Connection Method	Flared

Outdoor Unit Dimensions

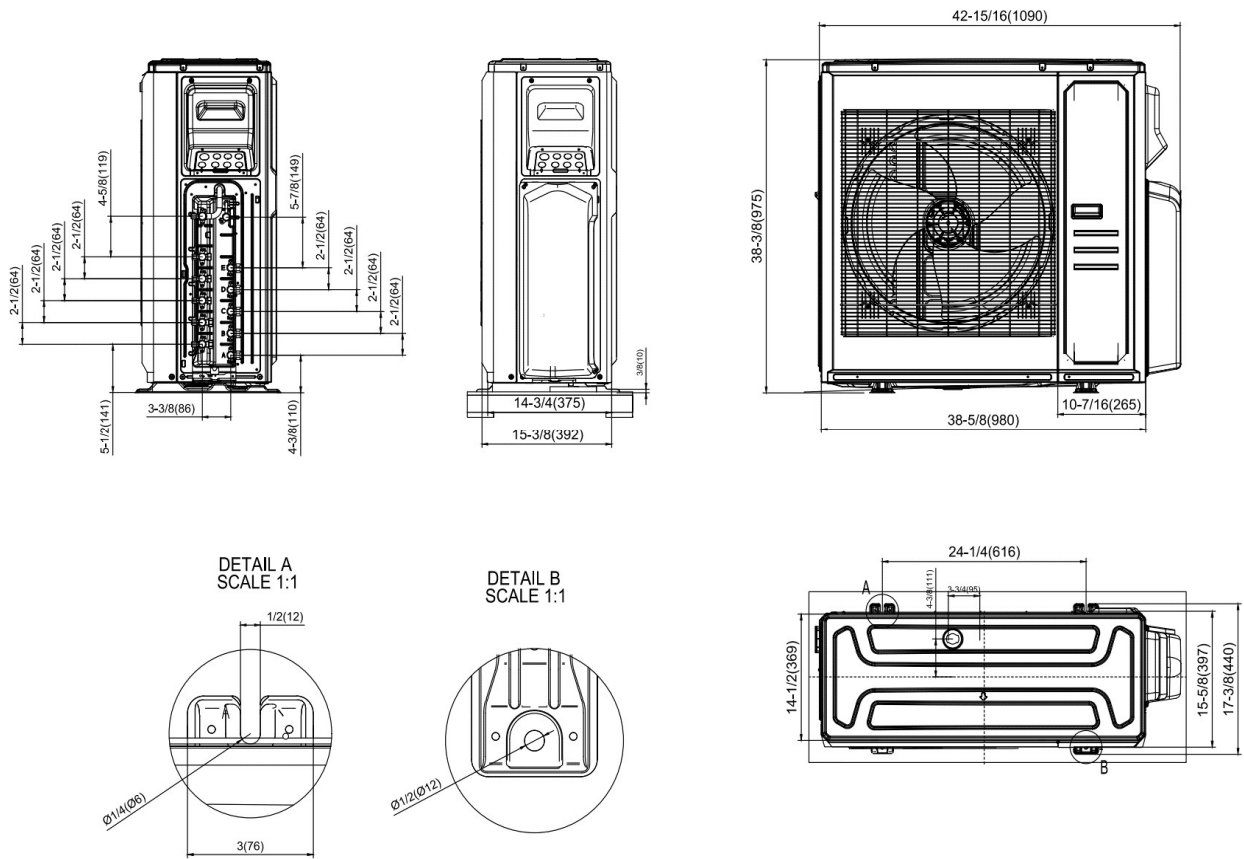

Outdoor Unit Clearances

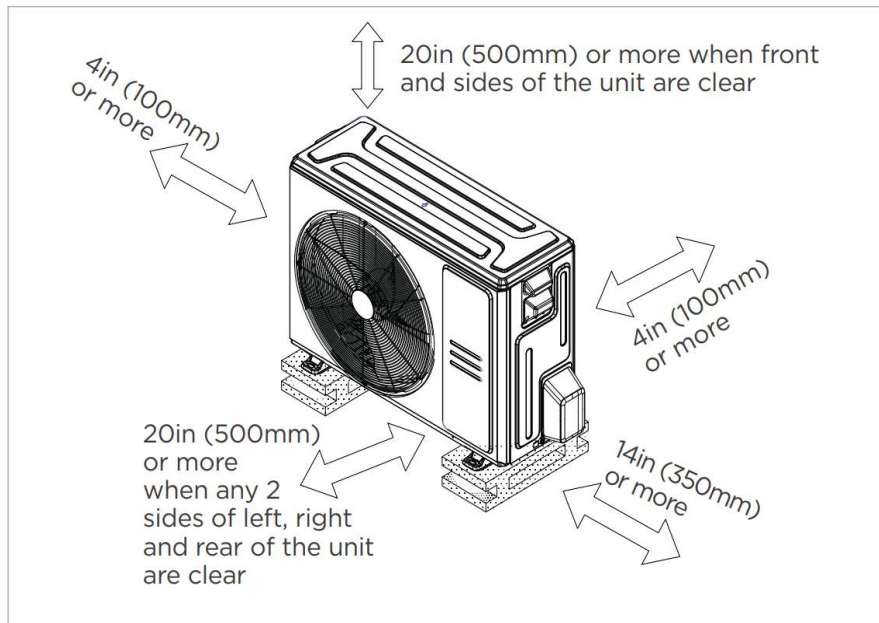

Meets all spatial requirements shown in Installation Clearance Requirements above.