

SUBMITTAL DATA SHEET

Series Name: Multi Zone Hyper Heat Series
Model Number: CCOXHBMZ536HP/DUCTLESS INDOOR



Multi Zone Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



OUTDOOR SPECIFICATION

Compressor Type	TWIN-ROTARY
Compressor Model	EKPQ420D1UMUA
Refrigerant	R454B
Refrigerant Oil Charge(mL)	1460
Refrigerant Oil	VG75
Outdoor Air Flow (Max) (CFM)	3037
Outdoor Noise Level (dBA)	65
Dimensions W×D×H (inches)	38.58 x 16.34 x 38.39
Package W×D×H (inches)	45.08 x 19.68 x 42.52
Net/Gross Weight lbs.	211.86/244.71

ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	37
Connection Wiring	AWG 14-4
System MOCP	40
Compressor RLA	20.5
Outdoor Fan Motor RLA	2.6
Outdoor Fan Motor W	250
Indoor Fan Motor RLA	/
Indoor Fan Motor W	/
System Power Input @ Cooling (W)	2750/(600 ~ 4000)
System Power Input @ Heating (W)	2638/(600 ~ 3750)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

EFFICIENCY

Cooling		Heating	
SEER2	23.0	HSPF2-4	10.7
EER2	13	COP	4.0

COOLING PERFORMANCE (Btu/hr)

Rated Capacity	36000
Min/Max Capacity	9000~43000
Moisture Removal(L/h)	2
Standard Operating Range(*F/*C)	-22~122/(-30~50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

HEATING PERFORMANCE (Btu/hr)


1. @ 47°F Rated	36000
1. @ 47°F Min/Max Capacity	10000~44000
2. @ 17°F Rated(H32)	30000
3. @ 5°F Rated: Capacity / COP(H42)	36000/2
3. @ 5°F Max: Capacity	36000
Standard Operating Range(*F/*C)	-22~75/(-30~24)

PIPING


Liquid Size	5x6.35mm(5x1/4in)
Gas Size	3x9.52mm+2x12.7mm(3x3/8in+2x1/2in)
Max. Piping Length for all rooms(ft/m)	262.4/(80)
Max. Piping Length for one IDU(ft/m)	114.8/(35)
Max. Height Difference of IDU and ODU(ft/m)	49.2/(15)
Refrigerant Pre-charge Amount(oz/kg)	134.04/(3.8)
Refrigerant Precharge Length(ft/m)	24.6(7.5)x5
Additional Charge of Refrigerant (Φ6.35 (1/4") liquid pipe) ((oz/ft)/(g/m))	0.16/(15)
Additional Charge of Refrigerant (Φ9.52 (3/8") liquid pipe) ((oz/ft)/(g/m))	0.32(30)
Connection Method	Flared

1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

Outdoor Unit Dimensions

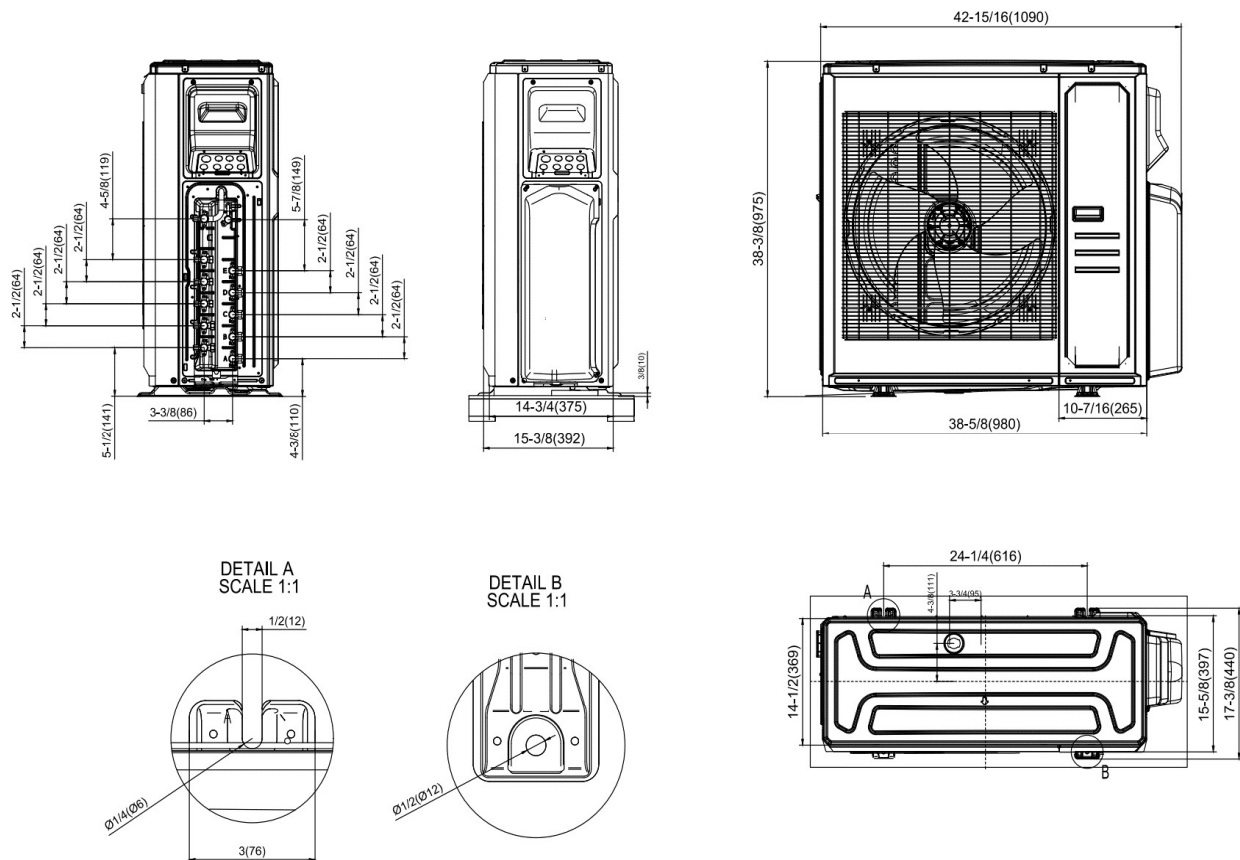

Outdoor Unit Clearances

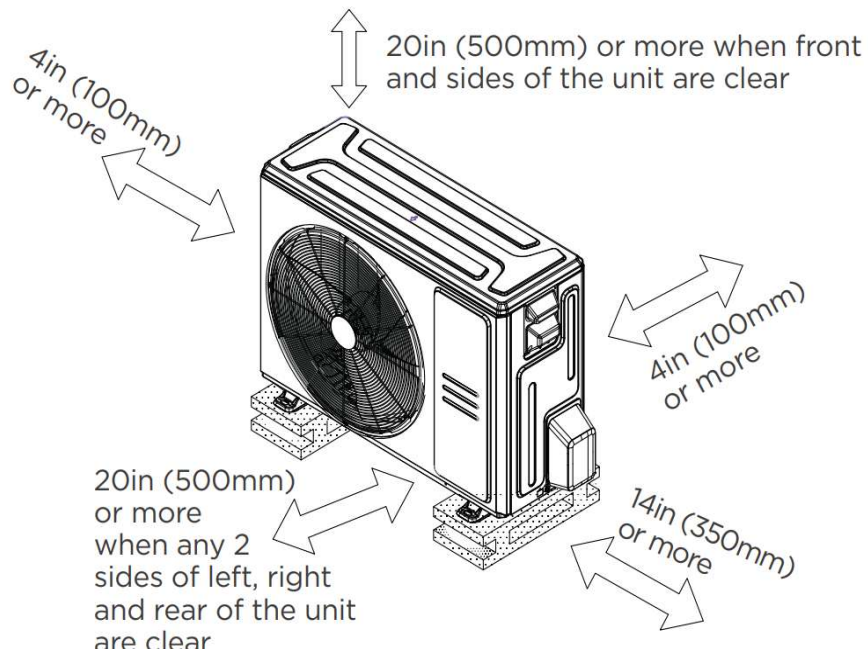

are clear.



Meets all spatial requirements shown in Installation Clearance Requirements above.